

Premier Acoustic Product Datasheet



Model: FM5/FTVA



Description

5.25", twin cone, flush mount ceiling speaker with innovative fitting system for fast and simple installation.


Fully compliant with **BS5839 part 8**, this speaker is supplied complete with:

- mild steel fire dome
- 150°C thermal fuse
- ceramic terminal block
- fire resistant internal cabling

Specification

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75 watts
SPL (1w/1m)	92dB
Max SPL (rated/1m)	99dB
Frequency Response	100Hz – 20kHz
Dimensions (diameter x depth)	180mm x 131mm
Cutout Size (diameter)	160mm
Material	steel
Weight (inc. packaging)	1.8kg
Dispersion 1kHz/4kHz	130° / 50°
Colour	White RAL 9003

Frequency Response

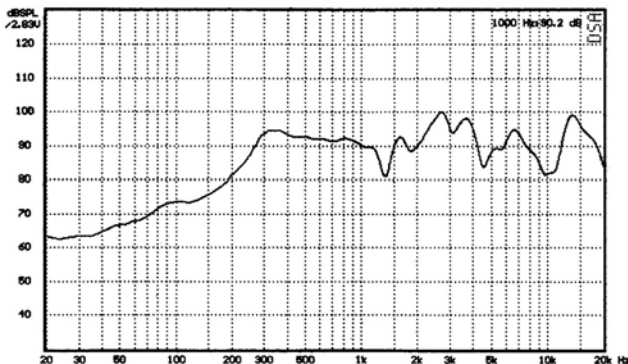

Polar Plot

