

# Premier Acoustic Product Datasheet



**Model: FM6/FTVA**



## Description

6.5", twin cone, flush mount ceiling speaker with innovative fitting system for fast and simple installation.


Fully compliant with **BS5839 part 8**, this speaker is supplied complete with:

- mild steel firedome capable of withstanding 650°C
- 150°C thermal fuse
- ceramic terminal block
- fire resistant internal cabling

## Specification

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75 watts
SPL (1w/1m)	93dB
Max SPL (rated/1m)	100dB
Frequency Response	100Hz – 20kHz
Dimensions (diameter x depth)	230mm x 127mm
Cutout Size (diameter)	200mm
Material	steel
Weight (inc. packaging)	2.4kg
Dispersion 1kHz/4kHz	120° / 90°
Colour	white

## Frequency Response

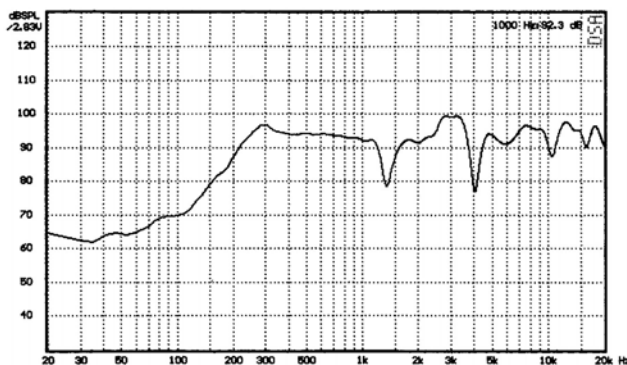

## Polar Plot

