

Premier Acoustic Product Datasheet



Model: SPL6/T



Description

Miniature flush mount ceiling speaker.

Measuring only 10cm in diameter, these speakers are designed to match low voltage spotlights.


2.5" full range driver unit

Available in black, white, gold or chrome

Specification

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75 watts
SPL (1w/1m)	85dB
Max SPL (rated/1m)	93dB
Frequency Response	170Hz - 20kHz
Dimensions (diameter x depth)	100mm x 95.5mm
Cut-out Size (diameter)	92mm
Material	ABS plastic with metal grill
Weight (inc. packaging)	0.55kg
Dispersion 1kHz/4kHz	190° / 90°
Colour	White, black, chrome or gold

Dimensions

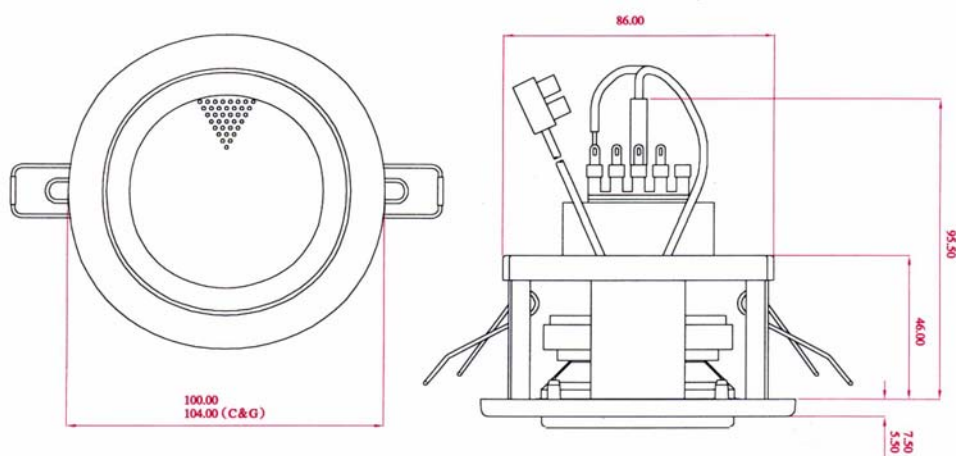

**Premier Acoustic Ltd, Unit 9, Sedgley Trading Estate, Sedgley Park,
Prestwich, Manchester M25 9WS
Tel: 0161 798 6336 Fax: 0161 798 6226
SPL6T.doc Page 1 of 1**