

Premier Acoustic Product Datasheet



Model: WXT Ceiling Tile Loudspeakers



Description

Ceiling tile loudspeakers for use in offices, retail outlets, hotels and more

Visually identical to suspended ceiling tile


Fixed in seconds

Non-directional sound projection allows crystal clear music and voice reproduction over a wide area

Available in a variety of plain and textured patterns to match any ceiling environment

Specification

MODEL	WXT04	WXT10
Frequency Response +/- 3dB	150Hz-20kHz	120Hz-20kHz
Sensitivity @ 1w/1m	85dB	85dB
Power (w) Low Impedance type 100v line type	25 Taps at 1,25, 2.5, 5	25 Taps at 1,25, 2.5, 55
Nominal Impedance (Low impedance type)	6 ohm	6 ohm
Dimensions (mm - Height x Width x Depth)	600 x 600	1200 x 600
PRODUCT LIST	DESCRIPTION	
WXT04/PL	600mm x 600mm ceiling tile, low impedance, Plain White finish	
WXT04/TL	600mm x 600mm ceiling tile, low impedance, Textured finish	
WXT04/FL	600mm x 600mm ceiling tile, low impedance, Fissured finish	
WXT04/PH	600mm x 600mm ceiling tile, 100v line, Plain White finish	
WXT04/TH	600mm x 600mm ceiling tile, 100v line, Textured finish	
WXT04/FH	600mm x 600mm ceiling tile, 100v line, Fissured finish	
WXT10 range	As WXT04 range, dimensions 1200 x 600 mm	

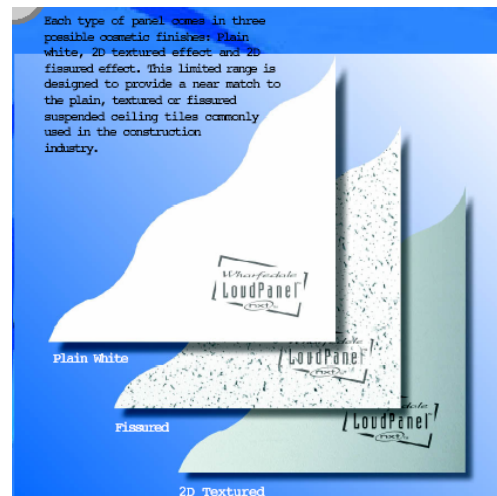

Premier Acoustic Ltd, Unit 9, Sedgley Trading Estate, Sedgley Park,
Prestwich, Manchester M25 9WS

Tel: 0161 798 6336 Fax: 0161 798 6226

WXT04 WXT10 Page 1 of 1