

Premier Acoustic Product Datasheet



Model: FMP6/T



Description

6.5" twin cone, flush mount economy ABS ceiling speaker with innovative installation method for fast and simple fitting.


Built in ceiling tile cut-out marker

Also available with an aluminium fire dome (FMP/FT) or as a voice evacuation speaker (FMP/FTVA).

Specification

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75 watts
SPL (1w/1m)	93dB
Max SPL (rated/1m)	100dB
Frequency Response	100Hz – 20kHz
Dimensions (diameter x depth)	230mm x 127mm
Cutout Size (diameter)	200mm
Material	High impact ABS
Weight (inc. packaging)	1.0 kg
Dispersion 1kHz/4kHz	120° / 90°
Colour	White

Frequency Response

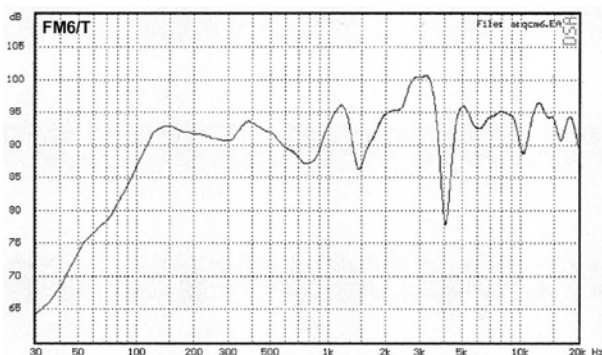

Polar Plot

