

# Premier Acoustic Product Datasheet



**Model: XL50/T**



## Description

2-way bass-reflex music speaker constructed from ABS plastic.

Supplied with wall mounting bracket and finished in black.

Front mounted bass reflex port for straightforward positioning


IPX5 rated – suitable for use outdoors.

Supplied with wall mounting bracket and finished in black.


## Specification

Power Handling	50 watts
Rated Input	100 volt and 8Ω
Transformer Tappings	50, 25, 12.5, 6.3 watts and 8Ω
SPL (1w/1m)	89dB
Max SPL (rated/1m)	106dB
Frequency Response	90Hz – 20kHz
Dispersion 1KHz/4KHz	120°/75°
Dimensions (height x width x depth)	274mm x 189mm x 183mm
IP Rating	IPX5
Material	ABS
Weight kg	4.6kg
Colour	Black RAL9005

## Frequency Response

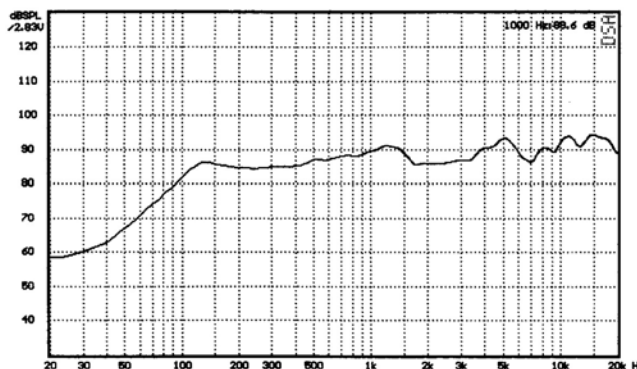

## Polar Plot

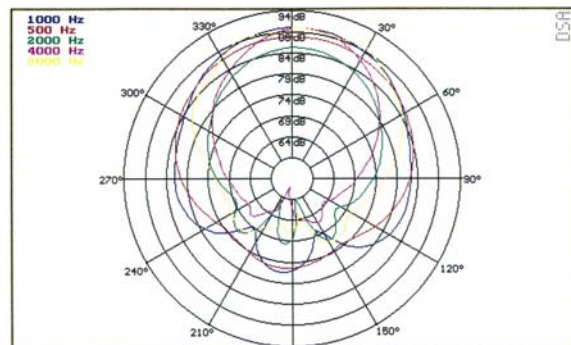

**Premier Acoustic Ltd, Unit 9, Sedgley Trading Estate, Sedgley Park,  
Prestwich, Manchester M25 9WS**

**Tel: 0161 798 6336 Fax: 0161 798 6226**

**XL50TWP.doc Page 1 of 1**