

Premier Acoustic Product Datasheet



Model: WSP6/T



Description

Highly versatile bass-reflex design fashion speaker suitable for wall mounting either vertically or horizontally

Rugged ABS unit with self-extinguishing UL94V0 housing


5.25" twin cone driver for high quality sound reproduction

Multi impedance 100 volt, 70.7 volt & 8Ω settings, plus tapings –via selector control.

Specification

Power Handling	6 watts
Rated Input	100 volt and 8 Ohm
Transformer Tappings	6, 3, 1.5, 0.75 watts and 8 Ohm
SPL (1w/1m)	93dB
Max SPL (rated/1m)	100dB
Frequency Response	160Hz - 20kHz
Dimensions (height x width x depth)	332mm x 210mm x 82mm
Material	High impact ABS plastic (metal grille)
Weight	1.22 kg
Dispersion 1KHz/4KHz	130°/80°
Colour	White RAL9016

Frequency Response

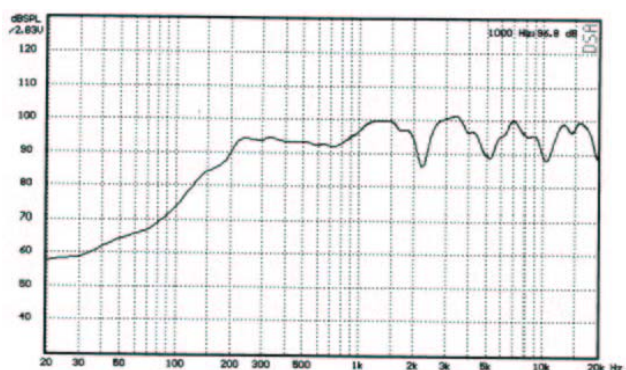

Polar Plot

