

Premier Acoustic Product Datasheet



Model: PMC6/TVA



Description

Robust, wall mounted cabinet speaker suitable for voice evacuation systems.

For ease of installation, all components are mounted on the main chassis and twin 20mm knockouts allow cables to be directly glanded on first fix.


Fully compliant with BS5839 part 8, this speaker is constructed from mild steel and is supplied with:

- 150°C thermal fuse
- twin ceramic terminal blocks
- fire resistant internal cabling


Specification

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75 watts
SPL (1w/1m)	91dB
Max SPL (rated/1m)	98dB
Frequency Response	150Hz – 18kHz
Dimensions (height x width x depth)	163.5 x 163.5 x 60
Material	steel
Dispersion 1KHz/4KHz	165°/70°
Weight (inc. packaging)	2.0kg
Colour	White RAL 9003

Frequency Response

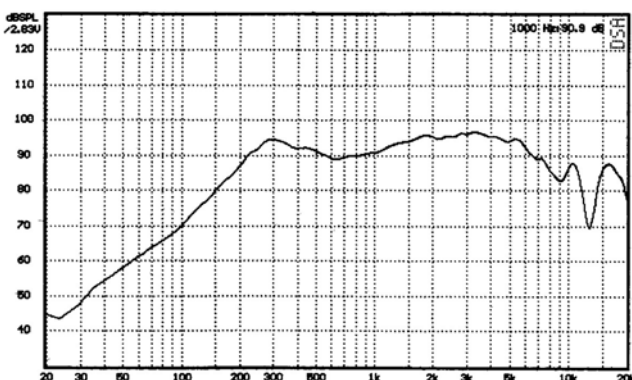

Polar Plot

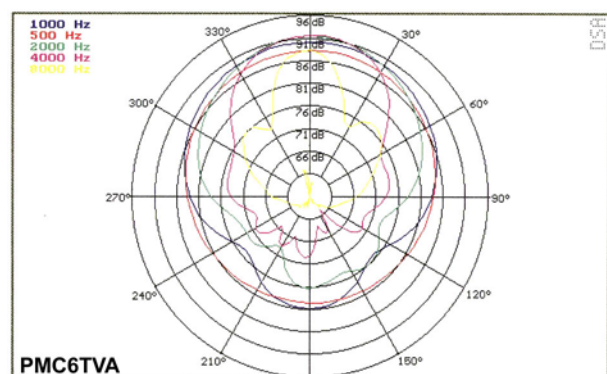

**Premier Acoustic Ltd, Unit 9, Sedgley Trading Estate, Sedgley Park,
Prestwich, Manchester M25 9WS**

Tel: 0161 798 6336 Fax: 0161 798 6226

PMC6TVA.doc Page 1 of 1