


Premier Acoustic Product Datasheet



Model: PMF6/TVA

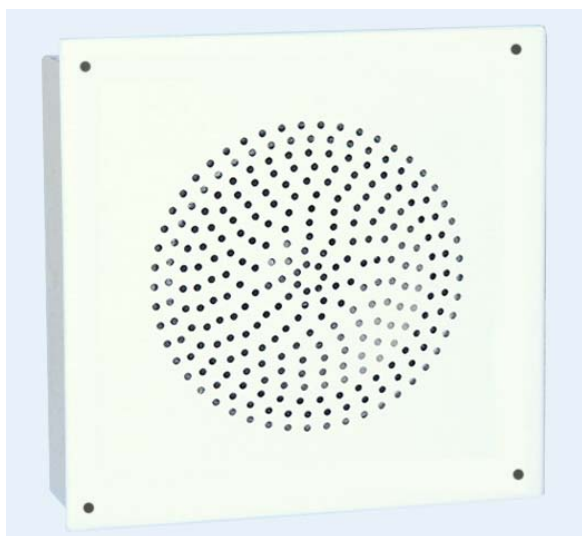

Description

Robust, flush mounted wall speaker suitable for voice evacuation systems.

For ease of installation, all components are mounted on the main chassis and twin knockouts allow cables to be directly glanded on first fix.

Fully compliant with **BS5839 part 8**, this speaker is constructed from mild steel and is supplied with:

- 150°C thermal fuse
- ceramic terminal block
- fire resistant internal cabling

Specification

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75, 0.375 watts
SPL (1w/1m)	91dB
Max SPL (rated/1m)	98dB
Frequency Response	78Hz – 16kHz
Dimensions (height x width x depth)	185mm x 185mm x 60mm
Material	steel
Weight (inc. packaging)	1.8kg
Colour	off white