


Premier Acoustic Product Datasheet



Model: PMC10/2TVA

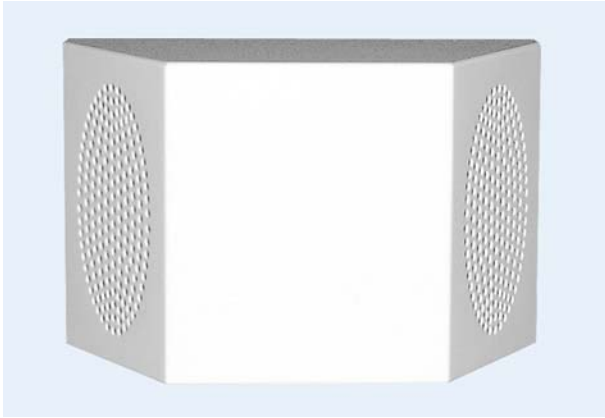

Description

Compact, bi-directional 'corridor' speaker with angled sides.


Fully compliant with **BS5839 part 8**, this speaker is constructed from mild steel and is supplied with:

- 150°C thermal fuse
- ceramic terminal block
- fire resistant internal cabling

Specification

| | |
|-------------------------------------|----------------------|
| Power Handling | 10 watts |
| Rated Input | 100 volt |
| Transformer Tappings | 10, 5, 2 watts |
| SPL (1w/1m) | 91dB |
| Max SPL (rated/1m) | 100dB |
| Frequency Response | 100Hz - 18kHz |
| Dimensions (height x width x depth) | 135mm x 210mm x 95mm |
| Material | steel |
| Weight (inc. packaging) | 2.2kg |
| Colour | White RAL 9003 |

Frequency Response

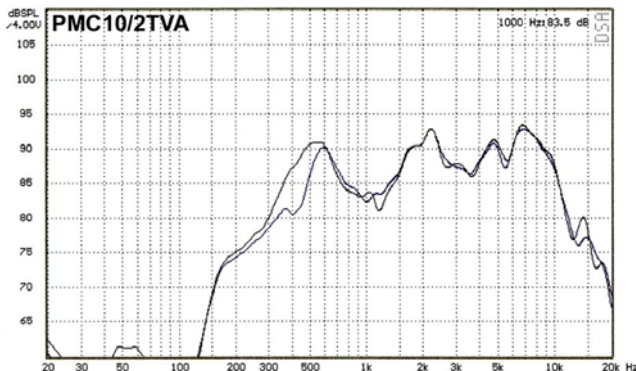

Polar Plot

