

Premier Acoustic Product Datasheet



Model: FM5/T



Description

Compact, 5.25" twin cone, flush mount ceiling speaker with innovative installation method for fast and simple fitting.


Built in ceiling tile cut-out marker

Shares generic low profile grille design with all other Premier Acoustic ceiling speakers


Specification

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75 watts
SPL (1w/1m)	92dB
Max SPL (rated/1m)	99dB
Frequency Response	100Hz – 20kHz
Dimensions (diameter x depth)	180mm x 127mm
Cutout Size (diameter)	160mm
Material	steel
Weight (inc. packaging)	1.4kg
Dispersion 1kHz/4kHz	130° / 50°
Colour	White RAL 9003

Frequency Response

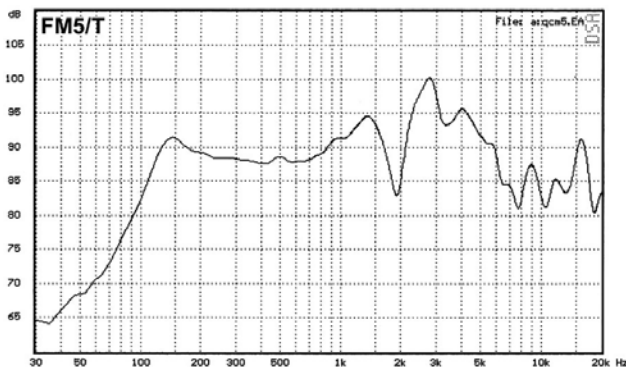

Polar Plot

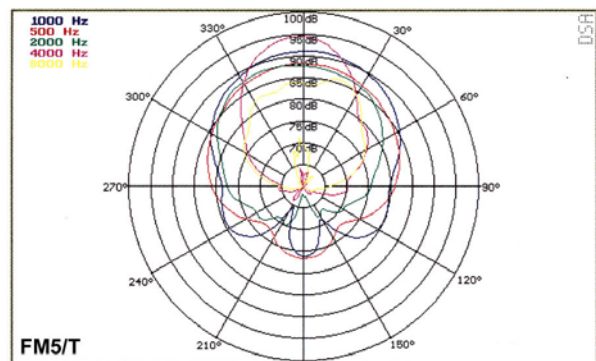

Premier Acoustic Ltd, Unit 9, Sedgley Trading Estate, Sedgley Park,
Prestwich, Manchester M25 9WS

Tel: 0161 798 6336 Fax: 0161 798 6226

FM5T.doc Page 1 of 1