

Premier Acoustic Product Datasheet



Model: PRH30/T



Description

High efficiency re-entrant horn speaker

IP66 rated – suitable for use outdoors.


Constructed from high impact ABS and finished in light grey

Supplied with stainless steel U-bracket.


Specification:

Power Handling	30 watts
Rated Input	100 volt
Transformer Tappings	30, 15, 7.5, 3.75 watts
SPL (1w/1m)	110dB
Max SPL (rated/1m)	125dB
Frequency Response	400Hz – 7.5KHz
IP rating	IEC 529 IP66
Dispersion 1KHZ/4KHz	100°/30°
Dimensions (diameter x depth)	238mm x 302mm
Material	High impact ABS
Weight	2.3kg
Colour	Light grey, RAL 7035

Frequency Response

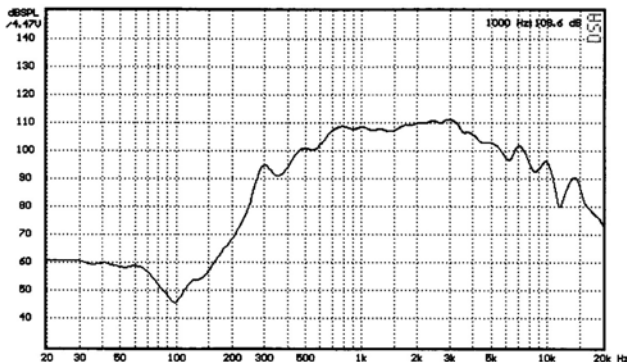

Polar Plot

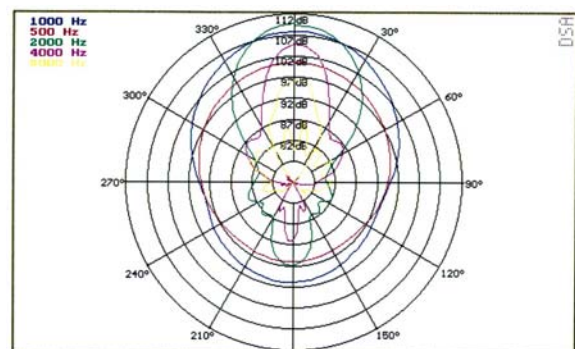

Premier Acoustic Ltd, Unit 9, Sedgley Trading Estate, Sedgley Park,
Prestwich, Manchester M25 9WS

Tel: 0161 798 6336 Fax: 0161 798 6226

PRH30/T Page 1 of 1