

Premier Acoustic Product Datasheet



Model: SM6/T



Description

6.5" twin cone, surface mount ceiling speaker with spun aluminium design

Generic grill design matches flush mount speakers in the same range.


Designed for use where no ceiling voids are present such as bulkheads, stairwells etc.

Innovative fitting system for fast and simple installation.

Specification

| | |
|-------------------------------|----------------------------------|
| Power Handling | 6 watts |
| Rated Input | 100 volt |
| Transformer Tappings | 6, 3, 1.5, 0.75 watts |
| SPL (1w/1m) | 94dB |
| Max SPL (rated/1m) | 101dB |
| Frequency Response | 150Hz – 20kHz |
| Dimensions (diameter x depth) | 266mm x 90mm |
| Material | Aluminium housing & steel grille |
| Weight (inc. packaging) | 1.3kg |
| Dispersion 1kHz/4kHz | 120° / 80° |
| Colour | White RAL 9003 |

Frequency Response

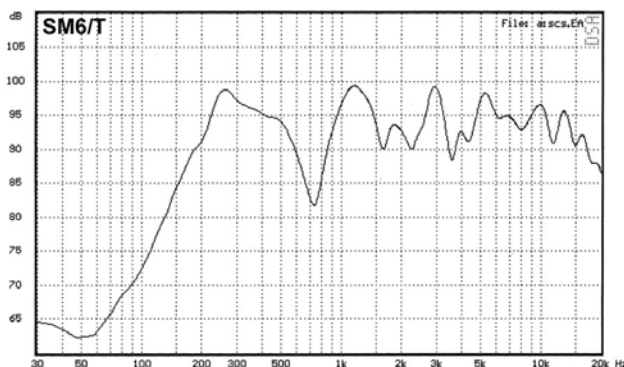

Polar Plot

