


# Premier Acoustic Product Datasheet



**Model: JEQ-1311**

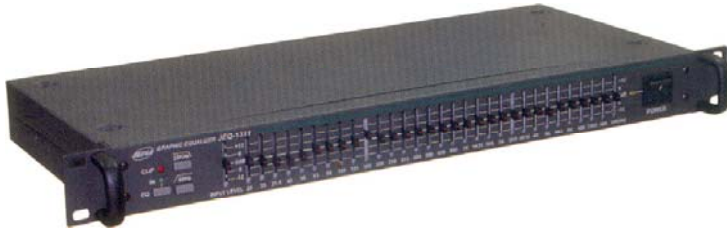

## Description

Rack mountable, 1U high,  
1-channel, 31-band EQ

- Balanced input
- Balanced output
- High pass filter (Low Cut), low pass filter (High Cut)
- The 'EQ In' switch bypasses the EQ settings to deliver the input directly to the output.
- Single channel, 1/3 octave from 20Hz - 20kHz.
- 120/220/230/240v AC or 12V DC operation.

## Specification

<b>Model Number:</b>	<b>JEQ-1311</b>
Input sensitivity / impedance	0.775V (0dBm)/15k $\Omega$ balanced
Output level / impedance	0.775V (0dBm)/600 $\Omega$ balanced
THD	< 0.03%
Frequency response	< 1dB (20Hz-20kHz)
Signal to noise ratio	> 65dB
EQ boost / cut	+/-12dB
Power Consumption	7.5W
Weight (kg)	3.0
Dimensions (W x H x D) mm	483 x 44 x 200
Power requirement	120V/220V/230V/240V AC 50/60Hz or 12V DC

Premier Acoustic Ltd, Unit 9, Sedgley Trading Estate, Sedgley Park,  
Prestwich, Manchester M25 9WS

Tel: 0161 798 6336 Fax: 0161 798 6226